

150 Tack Tank

LeeBoy



Performance Features:

The 150 Tack Distributor ideally serves the paving contractor dedicated to smaller projects. With a conservative 150 gallon capacity tank, this solution still boast of many features and functions of the larger units. Inclusive of a powerful Honda engine, the user-friendly design can either be trailer or skid mounted. Multiple additional options including in-cab controls or overnight heating can further enhance the end user's experience.

- 150 Gallon (568 l) Capacity Tank
- 4.8 hp (3.6 kw) Honda Engine
- 6' (1.8 m) Wand with On/Off Valve
- 40' (12.19 m) Heavy-Duty Recoil Hose Reel
- 2,771 lbs (1,256 kg) Loaded Weight
- Rear Tank Sampling Valve
- Two 54,000 BTU Propane Burners
- Trailer or Skid-Mount Configurations
- Optional Accessories Available



150 Tack Distributor Specifications



Tank Size	150 gallons (567.8 l)
Dimensions (Trailer Configuration)	<ul style="list-style-type: none"> - Length: 11' (3.35 m) - Width: 6' 6" (1.98 m) - Height: 7' 2" (2.18 m) - Shipping Weight: 1,556 lbs (705.7 kg)
Dimensions (Skid Mount Configuration)	<ul style="list-style-type: none"> - Length: 6' 4" (1.93 m) - Width: 4' (1.21 m) - Height: 6' 6" (1.98 m) - Shipping Weight: 900 lbs (408 kg)
Engine	Honda – 4.8 hp (3.6 kw)
Capacities	- Fuel: 1 gallon (3.79 l)
Tank Dimensions	<ul style="list-style-type: none"> - Length: 42.25" (1.07 m) - Width: 34" (.86 m) - Height: 30" (.76 m)
Asphalt Pump	- Specially designed 7 gallons per minute (26.5 lmp) pump
Heat System	<ul style="list-style-type: none"> - Two 54,000 BTU propane burners - One start burner - 30 lbs (13.6 kg) propane fuel tank
Temperature Gauge	- 50 - 300° F (10 - 149° C)
Flush Tank	- 7 gallons (26.5 l) tank with suck back valve

Hose and Reel	- .5" x 40' (13 mm x 12.19 m) heavy-duty recoil hose reel
Wand	<ul style="list-style-type: none"> - 6' (1.829 m) wand with cold handles - On/off valve - Removable spray tip
Fill Spout	10" x 10" (254 x 254 mm) with splash plate
Clean Out	- 4" (102 mm)
Access Valve	- 1" (25 mm)
Optional Equipment	<ul style="list-style-type: none"> - Electric start (available on Honda-Gas and Hatz-Diesel engine) - 5 hp Hatz diesel engine (pull start) - Insulated tank - Auto ignition burners (only available with electric start engine) - Auto ignition burners with outfire protection (only available with electric start engines) - 8' (2.4 m) spray bar - Spray bar lift (only available on skid-mounted unit) - In-truck controls (requires 8' spray bar option) - Overnight heater - Surge brakes (only available on trailer mounted unit) - 2inch ball hitch



ST Engineering LeeBoy, Inc. ■ 500 Lincoln County Parkway Extension ■ Lincolnton, NC 28092 ■ 704.966.3300
www.LeeBoy.com

LeeBoy and the LeeBoy logo are registered trademarks of ST Engineering LeeBoy, Inc. Equipment model names, slogans and subsidiary logos appearing in this collateral may be registered trademarks or the trademarks of ST Engineering LeeBoy, Inc. The technical data contained herein is subject to change due to continuous engineering and development. Accordingly, LeeBoy reserves the right to modify at any time. © 2020 ST Engineering LeeBoy, Inc. All rights reserved. BR-4001.4-EN



Awarded Contract

250 Tack Tank

LeeBoy



Perfect for the all-inclusive commercial paving contractor, the 250 Tack Distributor provides a perfectly sized tank for small to large projects including parking lots, patching, driveways or soil stabilization. Daily task can be completed with ease by relying on the trouble-free Honda powered engine and the proven reliable user-friendly design. Uniquely configurable, the customizable options give the contractor the ability to create a solution specific to their exact needs.

Performance Features:

- 250 Gallon (946 l) Capacity Tank
- 4.8 hp (3.6 kw) Honda Engine
- 6' (1.8 m) Wand with On/Off Valve
- 40' (12.19 m) Heavy-Duty Recoil Hose Reel
- 4,500 lbs (2,041 kg) Loaded Weight
- Rear Tank Sampling Valve
- Two 54,000 BTU Propane Burners
- Trailer or Skid-Mount Configurations
- Electric brakes
- Emergency Brake-Away System
- Optional Accessories Available



250 Tack Distributor Specifications



Tank Size	250 gallons (946 l)
Dimensions (Trailer Configuration)	<ul style="list-style-type: none"> - Length: 11' 6" (3.51 m) - Width: 6' 6" (1.98 m) - Height: 7' 6" (2.29 m) - Shipping Weight: 2,179 lbs (988.3 kg)
Dimensions (Skid Mount Configuration)	<ul style="list-style-type: none"> - Length: 6' 6" (1.98 m) - Width: 4' 4" (1.32 m) - Height: 5' 11" (1.8 m) - Shipping Weight: 1,380 lbs (626 kg)
Engine	Honda – 4.8 hp (3.6 kw)
Capacities	- Fuel: 1 gallon (3.79 l)
Tank Dimensions	<ul style="list-style-type: none"> - Length: 48.5" (1.23 m) - Width: 48.5" (1.23 m) - Height: 32.5" (.825 m)
Asphalt Pump	- Specially designed 7 gallons per minute (26.5 lmp) pump
Heat System	<ul style="list-style-type: none"> - Two 54,000 BTU propane burners - One start burner - 30 lbs (13.6 kg) propane fuel tank
Temperature Gauge	- 50 - 300° F (10 - 149° C)
Flush Tank	- 7 gallons (26.5 l) tank with suck back valve

Hose and Reel	- .5" x 40' (13 mm x 12.19 m) heavy-duty recoil hose reel
Wand	<ul style="list-style-type: none"> - 6' (1.829 m) wand with cold handles - On/off valve - Removable spray tip
Fill Spout	10" x 10" (254 x 254 mm) with splash plate
Clean Out	- 4" (102 mm)
Access Valve	- 1" (25 mm)
Optional Equipment	<ul style="list-style-type: none"> - Electric start (available on Honda-Gas and Hatz-Diesel engine) - 5 hp Hatz diesel engine (pull start) - Insulated tank - Auto ignition burners (only available with electric start engine) - Auto ignition burners with outfire protection (only available with electric start engines) - 8' (2.4 m) spray bar - Spray bar lift (only available on skid-mounted unit) - In-truck controls (requires 8' spray bar option) - Overnight heater - Surge brakes (only available on trailer mounted unit) - 2inch ball hitch



ST Engineering LeeBoy, Inc. ■ 500 Lincoln County Parkway Extension ■ Lincolnton, NC 28092 ■ 704.966.3300
For additional products or information, visit our website: www.LeeBoy.com

All trademarks identified by ® or ™ are registered trademarks of ST Engineering LeeBoy, Inc. The technical data contained herein is subject to change due to continuous engineering and product development. © 2019 ST Engineering LeeBoy, Inc. All rights reserved. BR-4002.3-EN



500 Tack Tank

LeeBoy



Contractors who want to embrace both small and large-scale projects demand the practicality of the 500 Tack Tank. Proven reliable and easy-to-use, operators are given trouble-free Honda power and safety-designed electric brakes at both axles with emergency brakes away reassurance. Trailer or skid-mounted configurations allow commercial pavers with an efficient yet adequate method for tack coating on job sites. To make this offering even more spectacular, it can be customized using numerous options to fit your exact needs.

Performance Features:

- 500 Gallon (1,892 l) Capacity Tank
- 4.8 hp (3.6 kw) Honda Engine
- 6' (1.8 m) Wand with On/Off Valve
- 40' (12.19 m) Heavy-Duty Recoil Hose Reel
- 7,270 lbs (3,298 kg) Loaded Weight
- Rear Tank Sampling Valve
- Two 54,000 BTU Propane Burners
- Trailer or Skid-Mount Configurations
- Electric brakes
- Emergency Brake-Away System
- Optional Accessories Available



500 Tack Distributor Specifications



Tank Size	500 gallons (1,892 l)
Dimensions (Trailer Configuration)	<ul style="list-style-type: none"> - Length: 14' 6" (4.42 m) - Width: 6' 6" (1.98 m) - Height: 6' 4" (1.93 m) - Shipping Weight: 3,050 lbs (1,370 kg)
Dimensions (Skid Mount Configuration)	<ul style="list-style-type: none"> - Length: 9' 9" (2.97 m) - Width: 4' 6" (1.37 m) - Height: 5' 6" (1.68 m) - Shipping Weight: 2,300 lbs (1,043 kg)
Engine	Honda – 4.8 hp (3.6 kw)
Capacities	- Fuel: 1 gallon (3.79 l)
Tank Dimensions	<ul style="list-style-type: none"> - Length: 7' (2.13 m) - Width: 48.5" (1.23 m) - Height: 32.5" (.825 m)
Asphalt Pump	- Specially designed 7 gallons per minute (26.5 lpm) pump
Heat System	<ul style="list-style-type: none"> - Two 54,000 BTU propane burners - One starter burner - 30 lbs (13.6 kg) propane fuel tank
Temperature Gauge	- 50 - 300° F (10 - 149° C)
Flush Tank	- 7 gallons (26.5 l) tank with suck back valve

Hose and Reel	- .5" x 40' (13 mm x 12.19 m) heavy-duty recoil hose reel
Wand	<ul style="list-style-type: none"> - 6' (1.829 m) wand with cold handles - On/off valve - Removable spray tip
Fill Spout	10" x 10" (254 x 254 mm) with splash plate
Clean Out	- 4" (102 mm)
Access Valve	- 1" (25 mm)
Optional Equipment	<ul style="list-style-type: none"> - Electric start (available on Honda-Gas and Hatz-Diesel engine) - 5 hp Hatz diesel engine (pull start) - Insulated tank - Auto ignition burners (only available with electric start engine) - Auto ignition burners with outfire protection (only available with electric start engines) - 8' (2.4 m) spray bar - Spray bar lift (only available on skid-mounted unit) - In-truck controls (requires 8' spray bar option) - Overnight heater - Surge brakes (only available on trailer mounted unit)




ST Engineering LeeBoy, Inc. ■ 500 Lincoln County Parkway Extension ■ Lincolnton, NC 28092 ■ 704.966.3300
For additional products or information, visit our website: www.LeeBoy.com

All trademarks identified by ® or ™ are registered trademarks of ST Engineering LeeBoy, Inc. The technical data contained herein is subject to change due to continuous engineering and product development. © 2019 ST Engineering LeeBoy, Inc. All rights reserved. BR-4003.3-EN



L150 Tack Tank

LeeBoy

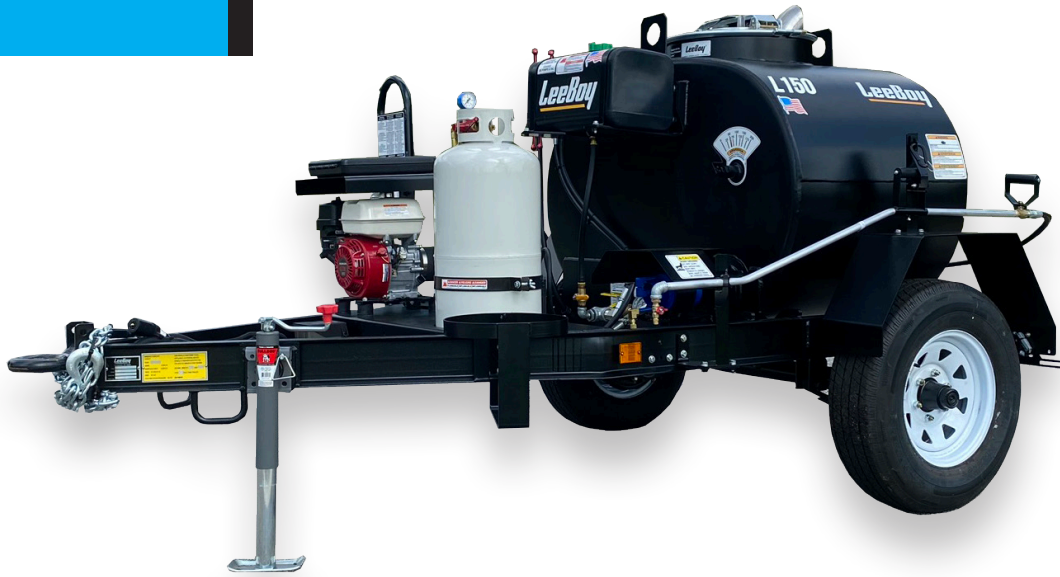

The 150 Tack Distributor ideally serves the paving contractor dedicated to smaller projects. With a conservative 150 gallon capacity tank, this solution still contains many of the features and functionality of the larger units. Inclusive of a powerful Honda engine, the user-friendly design can either be trailer or skid mounted. Multiple additional options including remote in-cab controls or overnight heating can further enhance the end user's experience.

Performance Features:

- 150 Gallon (567.8 l) Capacity Tank
- 4.8 hp (3.6 kw) Honda Engine
- 6' (1.8 m) Wand with On/Off Valve
- 40' (12.19 m) Heavy-Duty Recoil Hose Reel
- 3,400 lbs (1,542 kg) Loaded Weight
- 1" (25 mm) Rear Tank Sampling Valve
- One 300,000 BTU Propane Burner
- Trailer-Mounted or Skid-Mounted Configurations
- Electric brakes
- Emergency Brake-Away System
- Optional Accessories Available



L150 Tack Distributor Specifications



Tank Size	150 gallons (567.8 l)
Dimensions (Trailer Configuration)	<ul style="list-style-type: none"> - Length: 10' 6" (3.22 m) - Width: 6' 6" (1.98 m) - Height: 5' 9" (1.76 m) - Shipping Weight: 1,725 lbs (782 kg)
Dimensions (Skid Configuration)	<ul style="list-style-type: none"> - Length: 7' 6" (2.29 m) - Width: 4' 3" (1.28 m) - Height: 4' 9" (1.45 m)
Engine	Honda – 4.8 hp (3.6 kw)
Capacities	- Fuel: 1 gallon (3.79 l)
Tank Dimensions	<ul style="list-style-type: none"> - Length: 30.75" (.78 m) - Width: 54.125" (1.37 m) - Height: 36.25" (.92 m)
Asphalt Pump	- Specially designed 7 gallons per minute (26.5 lmp) pump
Heat System	<ul style="list-style-type: none"> - One 300,000 BTU propane burner - One start burner - 40 lbs (18.1 kg) propane fuel tank
Temperature Gauge	<ul style="list-style-type: none"> - 50 - 300° F (10 - 149° C) - Adjustable angle faceplate
Flush Tank	- 7 gallons (26.5 l) tank with suck back valve
Hose and Reel	- .5" x 40' (13 mm x 12.19 m) heavy-duty recoil hose reel

Wand	<ul style="list-style-type: none"> - 6' (1.829 m) wand with cold handles - On/off valve - Removable spray tip
Manhole	<ul style="list-style-type: none"> - 20" (508 mm) diameter - 10" (254 cm) diameter fill hole - 3 psi (2.1 bar) pressure relief
Clean Out	- 4" (102 mm)
Sampling Valve	- 1" (25 mm)
Additional Standard Equipment	<ul style="list-style-type: none"> - Waste bucket mount (trailer only) - 1" rear tank return - 2" in-tank overflow
Optional Equipment	<p>Engines</p> <ul style="list-style-type: none"> - Honda gas - 4.8 hp (3.6 kW) electric start - Hatz diesel - 7.2 hp (5.4 kW) pull start or electric start Fuel: 1.32 gallons (5.0 l) <p>Heat Systems</p> <ul style="list-style-type: none"> - Diesel Burner One 300,000 BTU diesel burner (only available with electric start engines) 7 gallon (26.5 l) fuel tank Auto ignition diesel burner with outfire <ul style="list-style-type: none"> - Overnight Heat 120 volt/1000 watt Immersion element <p>Spray bar</p> <ul style="list-style-type: none"> - Spray width: 12' (3.65 m) - Spray Bar Controls: In-truck wireless remote controls (requires spray bar option) - Spray bar lift with wireless remote control <p>Insulated Tank</p> <ul style="list-style-type: none"> 2-5/16" ball hitch



ST Engineering LeeBoy, Inc. ■ 500 Lincoln County Parkway Extension ■ Lincolnton, NC 28092 ■ 704.966.3300
www.LeeBoy.com

LeeBoy and the LeeBoy logo are registered trademarks of ST Engineering LeeBoy, Inc. Equipment model names, slogans and subsidiary logos appearing in this collateral may be registered trademarks or the trademarks of ST Engineering LeeBoy, Inc. The technical data contained herein is subject to change due to continuous engineering and development. Accordingly, LeeBoy reserves the right to modify at any time. © 2020 ST Engineering LeeBoy, Inc. All rights reserved. BR-4006.2-EN



L300 Tack Tank

LeeBoy



Perfect for the all-inclusive commercial paving contractor, the L300 Tack Distributor provides a perfectly sized tank for small to large projects including parking lots, patching, driveways or soil stabilization. Daily task can be completed with ease by relying on the trouble-free Honda powered engine and the proven reliable user-friendly design. Uniquely configurable, the customizable options give the contractor the ability to create a solution specific to their exact needs.

Performance Features:

- 300 Gallon (1,136 l) Capacity Tank
- 4.8 hp (3.6 kw) Honda Engine
- 6' (1.8 m) Wand with On/Off Valve
- 40' (12.19 m) Heavy-Duty Recoil Hose Reel
- 4,400 lbs (1,996 kg) Loaded Weight
- 1" (25 mm) Rear Tank Sampling Valve
- One 300,000 BTU Propane Burner
- Trailer-Mounted or Skid-Mounted Configurations
- Electric brakes
- Emergency Brake-Away System
- Optional Accessories Available



L300 Tack Distributor Specifications



Tank Size	300 gallons (1,136 l)
Dimensions (Trailer Configuration)	<ul style="list-style-type: none"> - Length: 12' 1" (3.68 m) - Width: 6' 4" (1.94 m) - Height: 5' 9" (1.76 m) - Shipping Weight: 1,950 lbs (885 kg)
Dimensions (Skid Configuration)	<ul style="list-style-type: none"> - Length: 8' 10" (2.69 m) - Width: 4' 3" (1.28 m) - Height: 4' 9" (1.45 m)
Engine	Honda – 4.8 hp (3.6 kw)
Capacities	- Fuel: 1 gallon (3.79 l)
Tank Dimensions	<ul style="list-style-type: none"> - Length: 52" (1.32 m) - Width: 54.125" (1.37 m) - Height: 36.25" (.92 m)
Asphalt Pump	- Specially designed 7 gallons per minute (26.5 lmp) pump
Heat System	<ul style="list-style-type: none"> - One 300,000 BTU propane burner - One start burner - 40 lbs (18.1 kg) propane fuel tank
Temperature Gauge	<ul style="list-style-type: none"> - 50 - 300° F (10 - 149° C) - Adjustable angle faceplate
Flush Tank	- 7 gallons (26.5 l) tank with suck back valve
Hose and Reel	- .5" x 40' (13 mm x 12.19 m) heavy-duty recoil hose reel

Wand	<ul style="list-style-type: none"> - 6' (1.829 m) wand with cold handles - On/off valve - Removable spray tip
Manhole	<ul style="list-style-type: none"> - 20" (508 mm) diameter - 10" (254 cm) diameter fill hole - 3 psi (2.1 bar) pressure relief
Clean Out	- 4" (102 mm)
Sampling Valve	- 1" (25 mm)
Additional Standard Equipment	<ul style="list-style-type: none"> - Waste bucket mount (trailer only) - 1" rear tank return - 2" in-tank overflow
Optional Equipment	<p>Engines</p> <ul style="list-style-type: none"> - Honda gas - 4.8 hp (3.6 kW) electric start - Hatz diesel - 7.2 hp (5.4 kW) pull start or electric start Fuel: 1.32 gallons (5.0 l) <p>Heat Systems</p> <ul style="list-style-type: none"> - Diesel Burner One 300,000 BTU diesel burner (only available with electric start engines) 7 gallon (26.5 l) fuel tank Auto ignition diesel burner with outfire - Overnight Heat 120 volt/1500 watt Immersion element <p>Spray bar</p> <ul style="list-style-type: none"> - Spray width: 12' (3.65 m) - Spray Bar Controls: In-truck wireless remote controls (requires spray bar option) - Spray bar lift with wireless remote control <p>Insulated Tank</p> <ul style="list-style-type: none"> 2-5/16" ball hitch



ST Engineering LeeBoy, Inc. ■ 500 Lincoln County Parkway Extension ■ Lincolnton, NC 28092 ■ 704.966.3300
www.LeeBoy.com

LeeBoy and the LeeBoy logo are registered trademarks of ST Engineering LeeBoy, Inc. Equipment model names, slogans and subsidiary logos appearing in this collateral may be registered trademarks or the trademarks of ST Engineering LeeBoy, Inc. The technical data contained herein is subject to change due to continuous engineering and development. Accordingly, LeeBoy reserves the right to modify at any time. © 2020 ST Engineering LeeBoy, Inc. All rights reserved. BR-4004.5-EN



L600 Tack Tank

LeeBoy



Performance Features:

Perfect for the all-inclusive commercial paving contractor, the L600 Tack Distributor provides a perfectly sized tank for larges projects including parking lots, patching, driveways or soil stabilization. Daily tasks can be completed with ease by relying on the trouble-free Honda powered engine and the proven reliable user-friendly design. Uniquely configurable, the customizable options give the contractor the ability to create a solution specific to their exact needs.

- 600 Gallon (2,271 l) Capacity Tank
- 4.8 hp (3.6 kw) Honda Engine
- 6' (1.8 m) Wand with On/Off Valve
- 40' (12.19 m) Heavy-Duty Recoil Hose Reel
- 8,250 lbs (3,742 kg) Loaded Weight
- 1" (25 mm) Rear Tank Sampling Valve
- One 300,000 BTU Propane Burner
- Trailer-Mounted or Skid-Mounted Configurations
- Electric brakes
- Emergency Brake-Away System
- Optional Accessories Available



L600 Tack Distributor Specifications



Tank Size	600 gallons (2,271 l)
Dimensions (Trailer Configuration)	<ul style="list-style-type: none"> - Length: 15' 8" (4.78 m) - Width: 6' 4" (1.94 m) - Height: 5' 9" (1.76 m) - Shipping Weight: 3,380 lbs (1,533 kg)
Dimensions (Skid Configuration)	<ul style="list-style-type: none"> - Length: 12' 8" (3.86 m) - Width: 4' 3" (1.28 m) - Height: 4' 9" (1.45 m)
Engine	Honda – 4.8 hp (3.6 kw)
Capacities	- Fuel: 1 gallon (3.79 l)
Tank Dimensions	<ul style="list-style-type: none"> - Length: 97.875" (2.48 m) - Width: 54.125" (1.37 m) - Height: 36.25" (.92 m)
Asphalt Pump	- Specially designed 7 gallons per minute (26.5 lmp) pump
Heat System	<ul style="list-style-type: none"> - One 300,000 BTU propane burner - One start burner - 40 lbs (18.1 kg) propane fuel tank
Temperature Gauge	<ul style="list-style-type: none"> - 50 - 300° F (10 - 149° C) - Adjustable angle faceplate
Flush Tank	- 7 gallons (26.5 l) tank with suck back valve
Hose and Reel	- .5" x 40' (13 mm x 12.19 m) heavy-duty recoil hose reel

Wand	<ul style="list-style-type: none"> - 6' (1.829 m) wand with cold handles - On/off valve - Removable spray tip
Manhole	<ul style="list-style-type: none"> - 20" (508 mm) diameter - 10" (254 cm) diameter fill hole - 3 psi (2.1 bar) pressure relief
Clean Out	- 4" (102 mm)
Sampling Valve	- 1" (25 mm)
Additional Standard Equipment	<ul style="list-style-type: none"> - Waste bucket mount (trailer only) - 1" rear tank return - 2" in-tank overflow
Optional Equipment	<p>Engines</p> <ul style="list-style-type: none"> - Honda gas - 4.8 hp (3.6 kW) electric start - Hatz diesel - 7.2 hp (5.4 kW) pull start or electric start Fuel: 1.32 gallons (5.0 l) <p>Heat Systems</p> <ul style="list-style-type: none"> - Diesel Burner One 300,000 BTU diesel burner (only available with electric start engines) 7 gallon (26.5 l) fuel tank Auto ignition diesel burner with outfire <ul style="list-style-type: none"> - Overnight Heat 120 volt/1500 watt Immersion element <p>Spray bar</p> <ul style="list-style-type: none"> - Spray width: 12' (3.65 m) - Spray Bar Controls: In-truck wireless remote controls (requires spray bar option) - Spray bar lift with wireless remote control <p>Insulated Tank</p>



ST Engineering LeeBoy, Inc. ■ 500 Lincoln County Parkway Extension ■ Lincolnton, NC 28092 ■ 704.966.3300
www.LeeBoy.com

LeeBoy and the LeeBoy logo are registered trademarks of ST Engineering LeeBoy, Inc. Equipment model names, slogans and subsidiary logos appearing in this collateral may be registered trademarks or the trademarks of ST Engineering LeeBoy, Inc. The technical data contained herein is subject to change due to continuous engineering and development. Accordingly, LeeBoy reserves the right to modify at any time. © 2020 ST Engineering LeeBoy, Inc. All rights reserved. BR-4005.4-EN

